


MGA FRONT TELESCOPIC DAMPER CONVERSION

FITTING INSTRUCTIONS

This is a bolt-on conversion which has been designed to give the optimum performance, ride quality and handling. The kit is for use with MGB stub axles and wishbones. The original MGA ones must be replaced before installation of this kit. This will also allow fitment of Frontline's alloy 4-pot ventilated disc brake conversion kit.

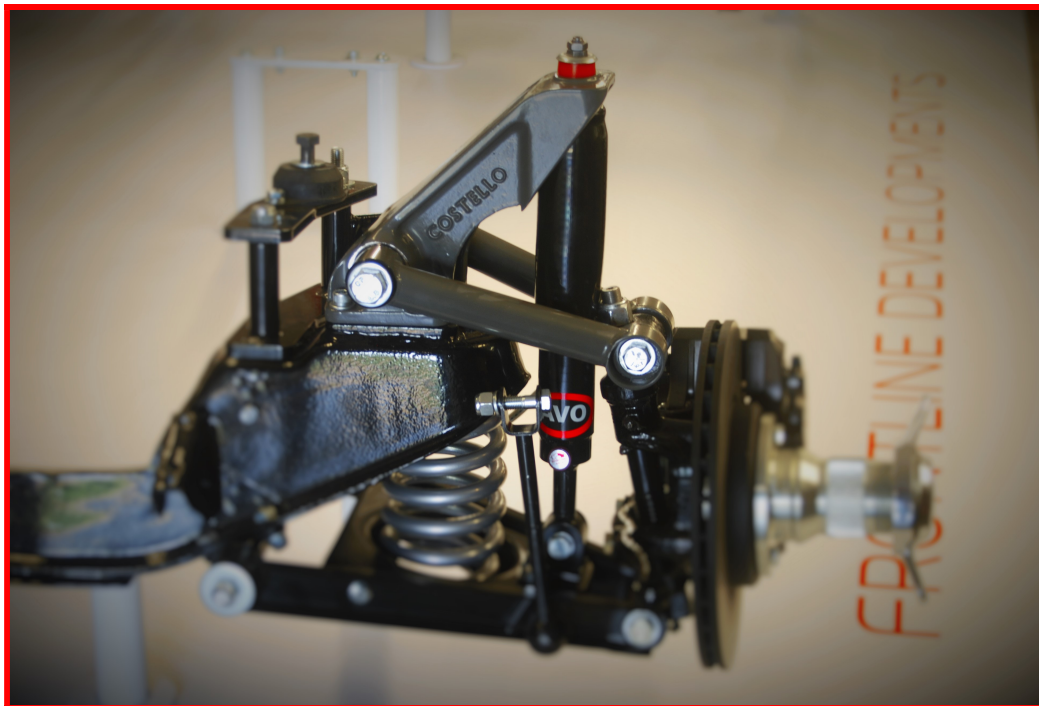

The conversion kit consists of a pair of precision-machined LM25 aluminium top bracket and tubular wishbone arms, bespoke Avo adjustable telescopic dampers, lower damper mounting brackets and a fitting kit.

NOTE: Before you start to fit the kit, we recommend that you check all related suspension items (king pins, hub bearings, bushes etc.) and replace as required while installing the conversion. In addition, performance can be enhanced by using polyurethane bushes and a 3/4 anti roll bar (for road use).

FITTING

- Remove the original lever arm damper units according to the workshop manual, ensuring that the lower MGB wishbone arms and springs are supported and safe.
- Remove the rubber bump stop brackets. Cut off the mounting plates attached to the cross member, flush with the ends of the cross member. An angle grinder and a cutting disc are best suited to this job. Repaint the area thoroughly to prevent corrosion.
- Use a small hammer to dress the outer end of the cross member towards the spring to gain clearance for the telescopic damper.
- Clean off the surrounding area to ensure no dirt enters the threads of the top mounting bolt. Clean the threads if necessary to ensure the nuts run freely on the threads.

- Swing the king pin assembly away from the car to gain access to the lower wishbone pan. This may require the brake caliper to be unbolted from the king pin. Take care to support the caliper and not to damage the brake hose if this is not being removed.
- Take the new lower damper mounting bracket and, using the socket button bolts, bolt it to the lower wishbone spring pan using the two existing holes and with the new third hole facing outwards. The third hole should be drilled and bolted into the wishbone pan using the new bracket as a guide. The button head bolt for the third bolt should be installed from above to allow clearance from the damper and from below for the existing two holes to allow clearance on the anti roll bar mounting.
- Offer the main bracket to the car. This is bolted down using the nylock nuts provided. Fitting these nuts can be a little tricky so ensure all 4 nuts are started and moving freely before tightening to 43-45 lbft.
- Remove the top half of the damper bush at the pin end and compress the damper a little by hand. Insert the damper, with the pin end uppermost, between the new top link and the new bottom bracket.
- Now bolt the lower damper eyelet to the lower bracket. Raise the suspension using a jack or similar and then re-fit the top half of the damper top mounting bush and tighten using the locking nuts.
- At this point check for clearance of the damper body against the front cross member. This should be about 5 mm. If it is not you will need to relieve the flange on the end of the cross member to allow sufficient clearance.
- On full droop the damper sometimes comes close to the large nut on top of the king pin. If it does interfere you may need to chamfer a small amount off the top edge of the nut (you only need a clearance here of 1mm to prevent damage to the damper). It is very rare to have to do this but caution should be exercised to make sure that the modifications are safe and secure. If in doubt please contact us or a competent mechanic
- Attach the outer end of the top arm to the top of the stub axle in the normal manner, using the ½ UNF x 4" bolts supplied. We recommend using polyurethane bushes for the top link.
- Re-fit the brake caliper where required and check the position and operation of the brake hose to ensure it will not foul anywhere.
- Repeat this installation procedure for the other side.
- Re-set the tracking to 2-3mm toe in overall (this is a guide setting and further adjustment may be required to gain the best overall handling characteristics).
- For the damper settings, we recommend turning the adjuster knob fully anti clockwise to a full soft setting. Then turn clockwise for 5 clicks. This is usually the optimum damper setting but it can be adjusted to set up to your personal requirements and driving style.



When first testing your new suspension we recommend you take time to get used to the difference. We suggest that trying out the limits of this, and any other product, should be done in a safe place.

After the initial tests we strongly recommend re checking all fixing points and further tightening if required.